


GM-IPOP 80 proximity and Bluetooth wall-mounted reader



Reference: GM-IPOP 80
Product code: 20720005
EAN code: 8429898021157

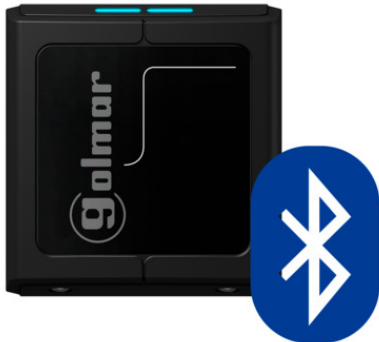

Main characteristics

- Water-proof and vandal-proof 13.56MHz proximity reader and 2SAFE technology.
- Integrates BLE technology that allows the user to access via smartphone (requires the purchase of "PUNTOS BLE" (BLE POINTS)). The application for its use is K-APP available on Android and IOS.
- For IP OPENER and EASYGATE controllers.
- Suitable with CARDDOOR MF+, TAGDOOR MF+, GM-WEIPOP, ISOPROX and KEYPROX cards and keyfobs.
- IP65 and IK10 protection ratings
- Outdoor wall installation

- Promotional video "Access via Bluetooth".
- Promotional video "Bluetooth Management".

Dimensions: 85(W) x 90(H) x 25(D) mm

More information

Specifications	
Technology	2SAFE
Type Function	Slave
Reading / Detection Type	Proximity,Bluetooth
RFID Frequency (MHz)	13.56
RFID Reading /coverage distance (cm)	4
Use	Outdoor,Indoor
Mounting	Surface
Incorporates base	Yes
State LEDs	Yes
Input voltage	12Vdc
Powered by controller	Yes
Degree of protection (IK)	10
Degree of protection (IP)	65
Maximum working temperature (°C)	60
Minimum working temperature (°C)	-20
Dimensions - High (mm)	90
Dimensions - Width (mm)	85
Dimensions - Deep (mm)	25
Weight (gr.)	85

Accessories

- 1 door access control panel GM-IPOP-1P
- 4 door access control panel GM-IPOP-4P
- CARDDOOR MF+ Mifare Plus Proximity Card
- ISOPROX proximity card
- Points for using the BLE function in IP Opener
- 2 door access control panel GM-IPOP-2P
- GM-USBIPOP USB programmer for EasyGate and IP Opener controllers
- TAGDOOR MF+ Mifare Plus proximity keyfob
- GM-WEIPOP RF/Proximity Mifare transmitter control for IPOP controllers

Visit in the website: <https://www.golmar.es/products/gm-ipop-80>

Visit in the website: <https://www.golmar.es/products/gm-ipop-80>